

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/049303 A1

(51) International Patent Classification⁷: B29C 47/10, B29D 11/00, C08J 3/18, C08K 5/053, C08L 29/04

(74) Agents: MANCINI, Vincenzo et al.; c/o Ing. A. Giambreno & C. SRL, Via Rosolino Pilo, 19/B, I-20129 Milano (IT).

(21) International Application Number:
PCT/EP2003/011995

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 29 October 2003 (29.10.2003)

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

Published:


(26) Publication Language: English

— with international search report

(71) Applicant (*for all designated States except US*): PIRELLI & C. S.P.A. [IT/IT]; Via Gaetano Negri, 10, I-20123 Milano (IT).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS FOR MANUFACTURING A WATER-RESISTANT TELECOMMUNICATION CABLE

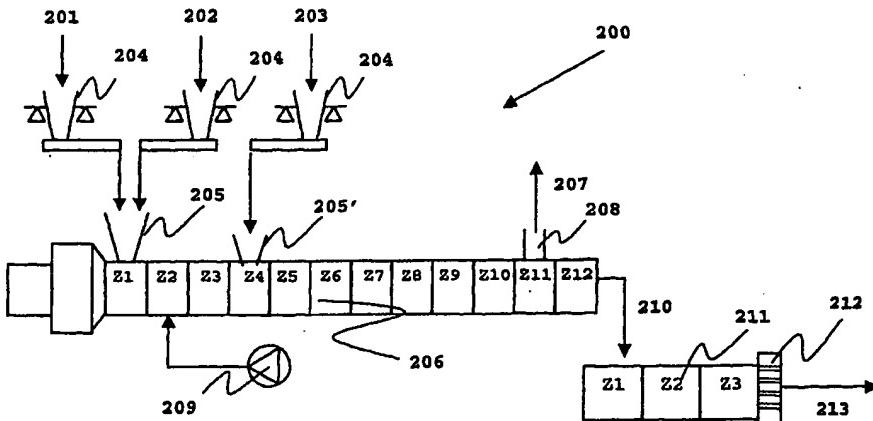

(57) Abstract: A process for manufacturing a water-resistant telecommunication cable is disclosed, the cable comprising a solid and compact element comprising a water-soluble polymer material comprising a vinyl alcohol/vinyl acetate copolymer having a hydrolysis degree of 60-95% and a polymerisation degree higher than 1,800- and at least one solid low-melting and one solid high melting plasticizers; the process comprising producing in continuous the water-soluble polymer material by separately feeding in sequence a multi-screw extruder, in the flow direction, with the copolymer and the high melting plasticizer, melting and mixing them while transporting them through the extruder, and with the low melting plasticizer, melting and mixing it with the copolymer and the high melting plasticizer, subsequently homogenizing the copolymer and the plasticizers and finally discharging the melt, at a temperature lower or equal to 205°C. The invention further concerns a process for extruding the above PVA based water-soluble polymer material. The process of the invention allows to extrude PVA with an enhanced productivity and reproducibility requiring shorter times for absorbing the plasticizers onto the polymer.

WO 2005/049303 A1